

5700 PANTHER® ALL DAY BATTERY FLOOR REMOVAL MACHINE



5700 Panther® All Day Battery Ride-On Machine

Appropriately named the All Day Battery Ride-On removal and floor preparation machine • This machine has the ability to operate through an average eight hour day without requiring a battery recharge, or electrical cord assistance • On board, built-in charging system has the versatility to plug into any outlet • Does not produce harmful fumes, allowing machine to be used on almost any jobsite

FEATURES:

- Allows extended run time
- Has the ability to operate 8 to 12 hours on a single charge depending on the floor application
- No need for multiple battery sets
- Comfortable to ride and drive
- Ergonomically designed controls for safe and easy handling
- Precise hydraulic steering for maneuvering in tight spaces
- Built-in charging system
- Unique swivel head keeps the blade in contact with the floor
- Sliding front plate allows for exact blade angle
- Adjustable blade pitch and angle
- Zero turn radius
- Non-marking tires
- Low maintenance
- Patent No. 6,813,834 - 7,562,412 - 7,082,686
- Other patents pending

5700 Panther® All Day Battery Ride-On, 115 V
5700-W Panther® All Day Battery Ride-On, 230 V

Demonstration DVD/Video
available upon request

Available with optional #6700 Hydraulic
Slide Plate - See Page 46 for details!

INCLUDED WITH THE 5700

- 7050-6.....6" Cutting Head
- 7050-10.....10" Cutting Head
- 7050-12.....12" Cutting Head (Mounted on Machine)
- 6260-BD.....6" .094 Self-Scoring Blade
- 6277-BU.....12" .094 Self-Scoring Blade
- 6284.....12" .094 Flat Blade
- 6285.....6" .094 Flat Blade
- 6286.....10" .094 Flat Blade
- 7077-8.....8" Wood Blade
- 7079-2.....2" Carbide Shank
- 7079-6.....6" Carbide Shank
- 5110-100 Front Wheel Assembly
- 5200-258 Debris Deflector
- 5200-400 Weights (6), 36 lbs. each (front)
- Safety Glasses
- Wrenches
- Instruction manual & DVD

Considering the extensive
hours operators occupy
the driver seat,
**National's Ride-On Machines
are engineered with *comfort*
and *longevity* in mind**

See pages 46-47 for
additional Ride-On Machine
ACCESSORIES

See pages 48-49 for
additional BLADES

Extended
Warranty Available

OPERATES AN ENTIRE AVERAGE WORK DAY WITHOUT RECHARGING THE BATTERY!



Efficiently works on all applications



Easily removes the toughest of direct glued carpet




Front sliding plate allows for exact blade angle



Excellent production rates

See in Action on the Web!
www.nationalequipment.com

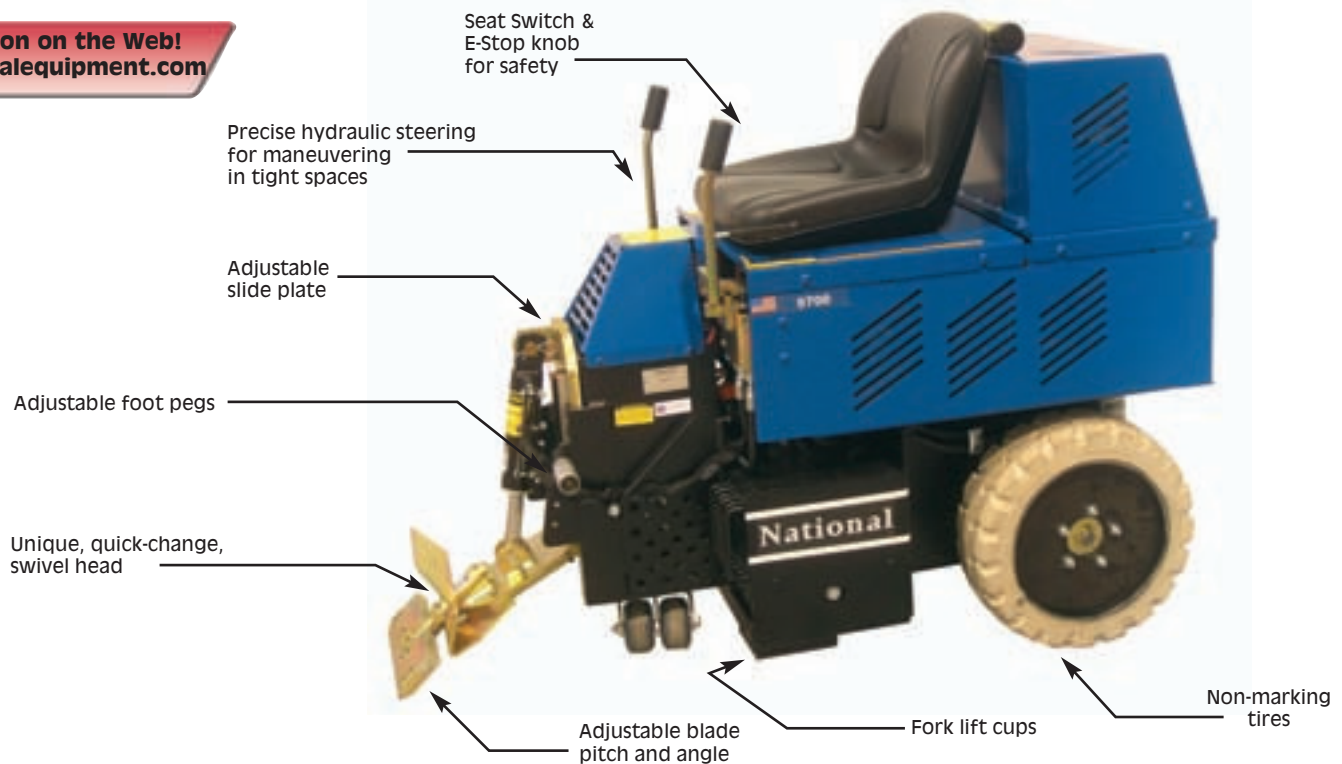

Specifications	5700
Width:	24½"
Height w/seat:	48"
Length w/o jaw:	54"
Empty Weight:	1847 lbs.
Fully Weighted:	2062 lbs.
Removable Weights to Front:	216 lbs.
Removable Weights to Back:	86 lbs.
Front Assembly:	100 lbs.
Speed:	Up to 120 ft. per minute

Average Production Rates per Hour*

- VCT 900 to 1600 up to 3000 sq. ft.
- Carpet 800 to 1800 up to 2500 sq. ft.
- Sheet vinyl/PVC solid 800 to 1600 up to 2000 sq. ft.
- Glued hardwood 200 to 600 up to 1200 sq. ft.
- Epoxy 100 to 1000 up to 1800 sq. ft.
- Elastomeric 100 to 1000 up to 1800 sq. ft.
- Ceramic tile 100 to 800 up to 1200 sq. ft.
- Rescrape & thin coatings up to 12,000 sq. ft.

*Removal rate will vary based on job conditions, material types, blade size and operator experience